7EH **TYPE COIL SPECIFICATION FOR** No.

Customer.

Customer's Dwg. Number Rev.

Customer's Part Number

Toko Sample Number 85AC-3001PPF

APPROVED BY

Signature

One copy with your signature is required as your confirmation to our Specifications.

	Customer's Specifications	Toko's Specifications
Center Frequency	Hz	10.7 M Hz
Tuning Range (3 — 4)	± %at Hz	10.7MHz ± 3 %at ----- Hz
Tuning Capacitance	pF ± %(int) + pF(ext)	33 pF ±10 %(int) + 5 pF(ext)
Inductance	± %at Hz	± %at Hz
Unloaded Q (Qu)	± %at Hz	100 ±20 %at 10.7 M Hz

Connection (Bottom View)

s:start of winding

k:key of case

x:cut of pin

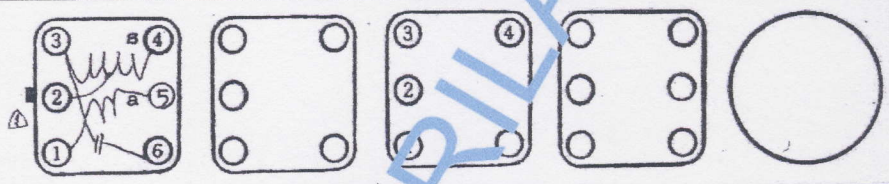

Stamp & Stamping side	Number of turns		
85AC 3001 PPF (4) (6)	3-4		20½
	3-2		15
	2-4		5½
	5-1		4½
Colour PINK			

NOTES 1. Qu & Ql measured without internal capacitor using Q-meter

2. Above sample modified from Toko Sample No.

3. (*) Indicates the data of customer's actual sample checked by Toko.

Approved by:	Made by:				
A. TAKEDA	Catherine Ng				
Coil Engineering Division, Hong Kong		SPEC.	1st April, 1981 10th January, 1981	TOKO FRANCE TOKO FRANCE	
			Issues	Via	Sig

TOKO ELECTRONIC MFG., CO., LTD. HONG KONG 49, Hoi Yuen Road 3rd Floor, Kwun Tong, Kowloon

SYMKRILAG UK