

Customer. C & A GREECE
 Customer's Dwg. Number _____ Rev. _____
 Customer's Part Number _____
 Toko Sample Number KACS-1506A


APPROVED BY _____
 Signature _____

One copy with your signature is required as your confirmation to our Specifications.

	Customer's Specifications		Toko's Specifications	
Center Frequency		Hz		10.7 MHz
Tuning Range (1 - 3)	±	%at	Hz	10.7MHz ± 3 %at ----- Hz
Tuning Capacitance	pF ±	%(int) +	pF(ext)	51 pF ± 10 %(int)+ 7 pF(ext)
Inductance	±	%at	Hz	± %at Hz
Unloaded Q (Qu)	±	%at	Hz	100 ± 20 %at 10.7 M Hz

Connection (Bottom View)

s:start of winding
 k:key of case
 x:cut of pin

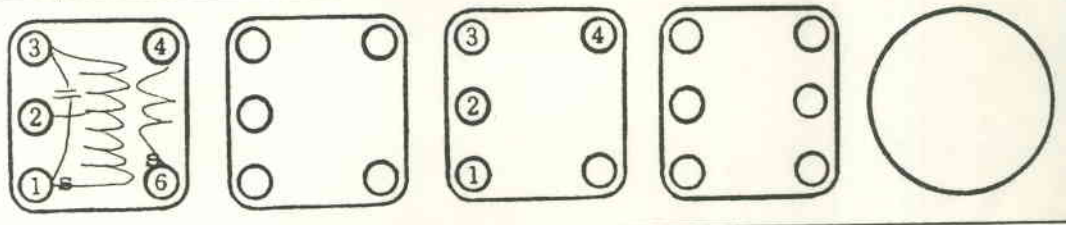

Stamp & Stamping side	Number of turns		
	1-3		15
	1-2		3
	2-3		12
	6-4		2
Colour BLACK			

NOTES 1. Qu & Ql measured without internal capacitor using Q-meter
 2. Above sample modified from Toko Sample No.
 3. (*) Indicates the data of customer's actual sample checked by Toko.

Approved by: A. TAKEDA Made by: Catherine Ng
 Coil Engineering Division, Hong Kong

Orig	13th January, 1981	TOKO FRANCE
Issues		Via
		Sig

