

7EH TYPE COIL SPECIFICATION FOR

No.

Customer. _____
 Customer's Dwg. Number _____ Rev. _____
 Customer's Part Number _____
 Toko Sample Number 85AC-3001PPF

APPROVED BY

Signature

One copy with your signature is required as your confirmation to our Specifications.


	Customer's Specifications		Toko's Specifications	
Center Frequency		Hz		10.7 M Hz
Tuning Range (3 - 4)	± %at	Hz	10.7MHz ± 3 %at	----- Hz
Tuning Capacitance	pF ± %(int) +	pF(ext)	33 pF ±10 %(int) +	5 pF(ext)
Inductance	± %at	Hz	± %at	Hz
Unloaded Q (Qu)	± %at	Hz	100 ±20 %at	10.7 M Hz

Connection (Bottom View)

s:start of winding


k:key of case

x:cut of pin

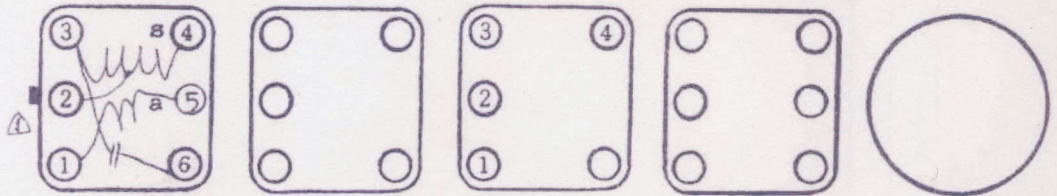

Stamp & Stamping side

Number of turns



3-4			20½
3-2			15
2-4			5½
5-1			4½

Colour PINK

- NOTES**
1. Qu & Ql measured without internal capacitor using Q-meter
 2. Above sample modified from Toko Sample No.
 3. (*) Indicates the data of customer's actual sample checked by Toko.

Approved by:

Made by:

A. TAKEDA

Catherine Ng

Coil Engineering Division, Hong Kong

1st April, 1981
 SPEC. 10th January, 1981

TOKO FRANCE
 TOKO FRANCE

Issues

Via

Sig

TOKO ELECTRONIC MFG., CO., LTD.



HONG KONG

49, Hoi Yuen Road 3rd Floor,
 Kwun Tong, Kowloon